



IWEISS

drapery • rigging • theatrical supplies • automation • artifact handling

ACOUSTICAL TEST REPORT

**15oz DRAMA+ VELOUR
62" WIDE**

FLAT - NO FULLNESS

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

SPONSOR: **IWEISS Holdings, LLC**
Fairview, NJ

Sound Absorption
RAL™-A25-538

CONDUCTED: 2025-12-02

Page 1 of 8

ON: 15oz Drama+ (0% Fullness-Flat)

TEST METHODOLOGY

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM C423-23: "Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method." The specimen mounting was performed according to ASTM E795-23: "Standard Practices for Mounting Test Specimens During Sound Absorption Tests." A description of the measurement procedure and room specifications are available upon request. The results presented in this report apply to the sample as received from the test sponsor.

INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as 15oz Drama+ (0% Fullness-Flat). The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

Product Under Test

Product Name: 15oz Drama+
Material ID: DRAMA+15BLKIFR
Frame/Edge Description: Hemmed
Core Material: Polyester
Air Space Depth: 6"
Nominal Dimensions: 9'-0" wide by 8'-0" high
Manufacturer: IWEISS Holdings, LLC

SPECIMEN MEASUREMENTS & TEST CONDITIONS

Through a full external visual inspection performed on the test specimen, Riverbank personnel verified the following information:

Test Specimen

Dimensions: 2743 mm (108 in.) by 2438 mm (96 in.)
Thickness: 1.17 mm (0.046 in.)
Overall Weight: 3.4 kg (7.5 lbs)



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED

IWEISS Holdings, LLC

2025-12-02

RAL™-A25-538

Page 2 of 8

SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)**Overall Specimen Properties**

Size: 2.74 m (108.0 in) wide by 2.44 m (96.0 in) long
Thickness: 0. m (0.046 in)
Weight: 3.4 kg (7.5 lbs)
Mass per Unit Area: 0.51 kg/m² (0.1 lbs/ft²)
Calculation Area: 6.689 m² (72. ft²)

Test Environment

Room Volume: 291.98 m³
Temperature: 21.0 °C ± 0.1 °C (Requirement: ≥ 10 °C and ≤ 5 °C change)
Relative Humidity: 57.6 % ± 1.2 % (Requirement: ≥ 40 % and ≤ 5 % change)
Barometric Pressure: 98.8 kPa (Requirement not defined)

MOUNTING METHOD Type G-150 Mounting: The drapery specimen was hung from a curtain rod built 152 mm (6 in.) off center from the vertical test surface. A piece of particle board was installed at the top of the specimen to prevent sound from passing into the airspace behind it. The numeral suffix in the mounting designation is the distance in millimeters from the vertical test surface to the centerline of the mounting rod, rounded to the nearest integer multiple of 5. Per sponsor request, the perimeter edges were left exposed, as would be typical of a field installation of the product under test.

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

IWEISS Holdings, LLC

2025-12-02

RAL™-A25-538

Page 3 of 8



Figure 1 – Specimen mounted in test chamber



Figure 2 – Detail of specimen materials

627 RIVERBANK DRIVE
 GENEVA, IL 60134
 630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
 WALLACE CLEMENT SABINE

IWEISS Holdings, LLC

2025-12-02

RAL™-A25-538

Page 4 of 8

TEST RESULTS

Specimen total absorption and absorption coefficient are tabulated at the eighteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages.

1/3 Octave Center

Frequency (Hz)	Total Absorption (m2)	Total Absorption (Sabins)	Absorption Coefficient
100	0.18	1.92	0.03
** 125	0.26	2.77	0.04
160	1.01	10.87	0.15
200	1.50	16.11	0.22
** 250	2.39	25.74	0.36
315	3.94	42.41	0.59
400	4.87	52.38	0.73
** 500	5.75	61.93	0.86
630	6.09	65.52	0.91
** 1000	6.08	65.49	0.91
1250	5.38	57.87	0.80
1600	4.48	48.19	0.67
** 2000	4.72	50.80	0.71
2500	5.27	56.73	0.79
3150	4.84	52.10	0.72
** 4000	5.21	56.13	0.78
5000	5.20	55.97	0.78
	5.02	54.02	0.75

SAA = 0.69
NRC = 0.70



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

IWEISS Holdings, LLC

RAL™-A25-538


Page 5 of 8


2025-12-02 TEST RESULTS (continued) The sound absorption average (SAA) is defined in ASTM

~~C423-23~~ Section 3.1.1 as the arithmetic average of the sound absorption coefficients of a material for the twelve one-third octave bands from 200 Hz through 2500 Hz, inclusive, rounded to the nearest integer multiple of 0.01. The noise reduction coefficient (NRC) is defined from previous versions of ASTM C423 as the arithmetic average of the sound absorption coefficients at 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz, rounded to the nearest integer multiple of 0.05.

Tested by 
MarcSciaky
SeniorExperimentalist

Report by 
Keith Kimberling
Test Engineer

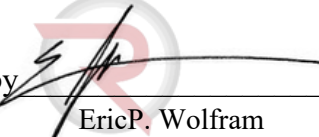Approved by 
Eric P. Wolfram
LaboratoryManager

 Digitally signed by
Eric P Wolfram
Date: 2025.12.04
13:34:59 -06'00'



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report


www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

IWEISS Holdings, LLC
2025-12-02

RAL™-A25-538
Page 6 of 8

SOUND ABSORPTION REPORT
15oz Drama+ (0% Fullness-Flat)

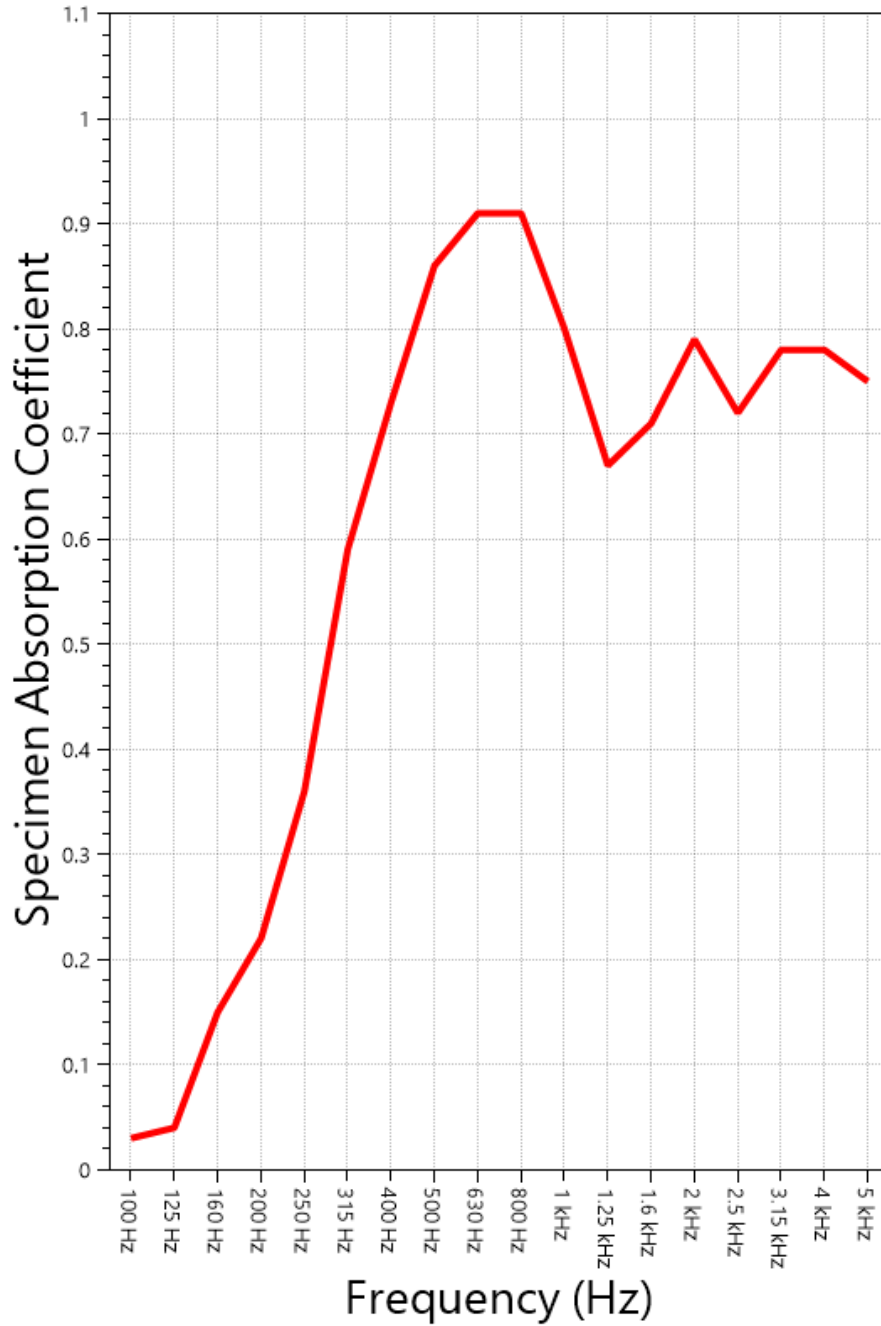

SAA = 0.69

NRC = 0.70



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED

627 RIVERBANK DRIVE
 GENEVA, IL 60134
 630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
 WALLACE CLEMENT SABINE

IWEISS Holdings, LLC 2025-12-02 APPENDIX A: Extended Frequency Range Data

Specimen: 15ozDrama+(0%Fullness-Flat)(SeeFullReport)

Page 7 of 8

The following non-accredited data were obtained in accordance with ASTM C423-23, but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes.

1/3 Octave Band Center Frequency (Hz)	Total Absorption (Sabins)	Absorption Coefficient
31.5	7.36	0.10
40	1.85	0.03
50	5.22	0.07
63	-0.04	0.00
80	3.18	0.04
100	1.92	0.03
125	2.77	0.04
160	10.87	0.15
200	16.11	0.22
250	25.74	0.36
315	42.41	0.59
400	52.38	0.73
500	61.93	0.86
630	65.52	0.91
800	65.49	0.91
1000	57.87	0.80
1250	48.19	0.67
1600	50.80	0.71
2000	56.73	0.79
2500	52.10	0.72
3150	56.13	0.78
4000	55.97	0.78
5000	54.02	0.75
6300	53.40	0.74
8000	51.14	0.71
10000	49.00	0.68
12500	39.85	0.55



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED

627 RIVERBANK DRIVE
GENEVA, IL 60134
630-232-0104

Test Report

www.riverbankacoustics.com

FOUNDED 1918 BY
WALLACE CLEMENT SABINE

IWEISS Holdings, LLC

2025-12-02

RAL™-A25-538

Page 8 of 8

APPENDIX B: Instruments of Traceability

Specimen: 15ozDrama+(0%Fullness-Flat)(See Full Report)

<u>Description</u>	<u>Model</u>	<u>Serial Number</u>	<u>Date of Certification</u>	<u>Calibration Due</u>
System 1	Type 3160-A-042	3160-106968	2025-07-21	2026-07-21
Bruel & Kjaer Mic And Preamp E	Type 4943-B-001	2311441	2025-06-09	2026-06-09
Bruel & Kjaer Pistonphone	Type 4228	2781248	2025-07-21	2026-07-21
EXTECH Hygro 662	SD700	A083662	2024-12-30	2025-12-30

APPENDIX C: Revisions to Original Test Report

Specimen: 15ozDrama+(0%Fullness-Flat)(See Full Report)

<u>Date</u>	<u>Revision</u>
2025-12-04	Original report issued

END